



RhinoAlutec®
Aluminum Circular Panel



ALC 1000/1250/1500

Aluminum Circular Panel (55% Airflow)


RhinoAlutec® aluminum circular panel (55% airflow) is an ideal solution for cooling, this panel is specifically designed with no underside obstructions to provide optimum laminar air flow. It has been widely used in data centers and server rooms.

RHINO®
Strive for perfection!

Product Ranges

RhinoAlutec® Circular

Panel

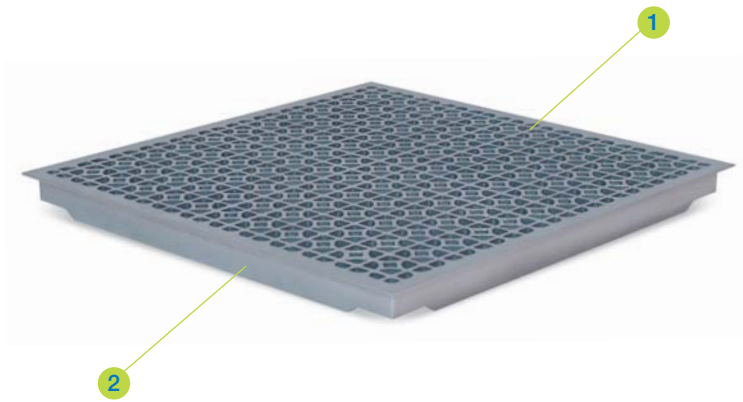

1 Airflow Rates

Rates: 55%

Aluminum Circular Panel

Size: 600 × 600mm

2 Thickness: 50/55mm


Material: Aluminum Alloy

Description

RhinoAlutec® aluminum circular panel (55% airflow) is an ideal solution for cooling, this panel is specifically designed with no underside obstructions to provide optimum laminar air flow. It has been widely used in data centers and server rooms.

Features

- Non-toxic and non-combustible
- Anti-corrosion and anti-magnetic
- Superb underfoot comfort
- Light weight and high load capacity
- 55% airflow rates
- Adaptable for both EU and Roc system

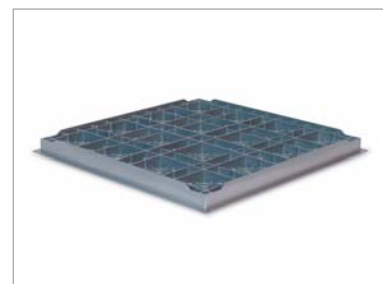


Panel Type	Panel Size	Core Material	Panel Construction	Panel Thickness (Nominal)	System Weight (Typical)
ALC 1000	600mm square	Aluminum Alloy	Aluminum Die-casted	50/55 mm	31.07 Kg/m ²
ALC 1250	600mm square	Aluminum Alloy	Aluminum Die-casted	50/55 mm	33.85 Kg/m ²
ALC 1500	600mm square	Aluminum Alloy	Aluminum Die-casted	50/55 mm	36.63 Kg/m ²

Product Ranges

RhinoAlutec® Circular

System

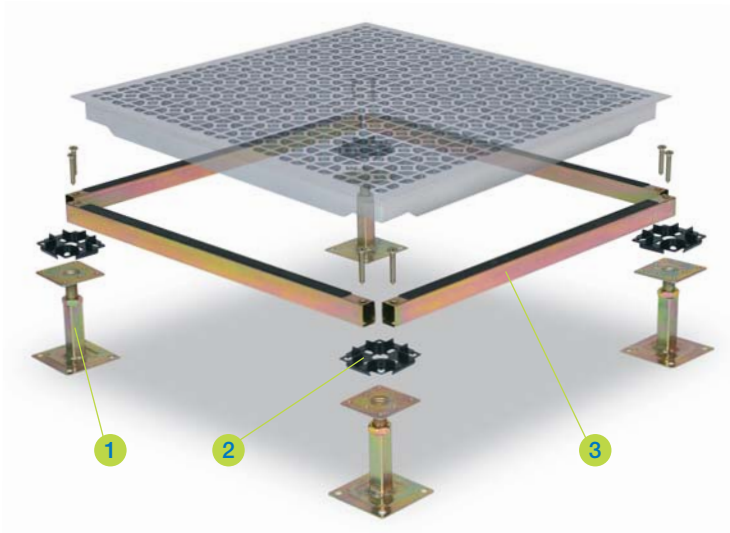

1 Standard Pedestal

Electra-galvanized steel made pedestal is suitable for raised floors with a finished floor height from 200mm to 600mm. Zinc whisker free is available for special order.
Material: Steel, Yellow Galvanized.


2 Head Gasket

Plastic conductive material with sound proofing and sealing functions, equipped with tabs for the positioning of panels.
Thickness: 2.0mm

3 Stringer

Steel tube performed stringer with plastic gasket on top provide best supports to the structural system with limited air leakage and outstanding acoustic performance.
Dimension: 568mm(L) × 21mm(W) × 32mm(H)
Thickness: 0.8/1.0/1.2mm

Pedestal

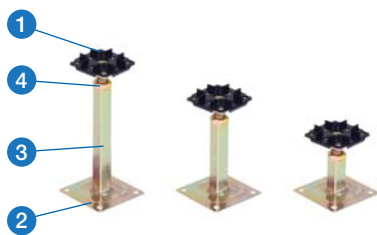

1 Head Assembly

Head plate: 75mm × 75mm × 3.0mm
Threaded rod: M18

2 Base Assembly

Base tube: □22mm × 2.5mm
Base plate: 100mm × 100mm × 2.5mm

3 FFH (Finished Floor Height)


200mm to 600mm

4 Adjusting Range

+/- 30mm

Performance

- This rigid grid system is tested in accordance with PSA MOB PS/SPU specification.
- Panel deflection at centre edge must not exceed 2.5mm
- Performance to a safety factor of 3 x static load
- Structural performance based upon a full Rhino access floors system i.e. panels & pedestals.

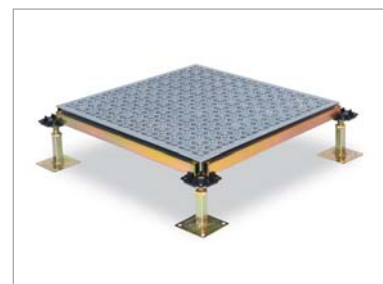

Panel Type	Panel Grade	Concentrated Load		Uniformly Distribution Load	Ultimate Load
		Point Load	Load Over		
		25mm × 25mm square	300mm × 300mm square		
ALC 1000	Heavy Duty	4.50 kN	N/A	12.00 kN/m ²	13.50 kN
ALC 1250	Extra Heavy Duty	5.56 kN	N/A	14.83 kN/m ²	16.68 kN
ALC 1500	Industrial Duty	6.67 kN	N/A	17.80 kN/m ²	20.01 kN

RHINO PROPERTY

RHINO[®]

Strive for perfection!

China Office

593, Tongjiang Road
Jintian Plaza 828-830
Changzhou 213022
Jiangsu, China

T/ (86) 519 8988 3171

F/ (86) 519 8988 3901

Bangkok Office

32 Soi Sukhumvit 36 (Napasub)
Sukhumvit Road, Klongton
Klongtoey, Bangkok 10110
Thailand

T/ (662) 661 2990

F/ (662) 661 2991

Hong Kong Office

7/F, Spa Centre
No. 53-55 Lockhart Road
Wai Chai
Hong Kong

T/ (852) 2793 5511

F/ (852) 3590 2333

Production Unit

Hengshanqiao
Wujin District
Changzhou 213119
Jiangsu, China

T/ (86) 519 8860 7959

F/ (86) 519 8860 5659

www.RhinoAccessFloors.com