



RhinoFLOR®
Chipboard Core Panel



RSP 800F/1000F

Airflow Panel


RhinoFLOR® Airflow panels are manufactured from structural steel technology makes the size and thickness same as RhinoFLOR® panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.

RHINO
Strive for perfection!

Product Ranges

RhinoFLOR® Airflow

Panel

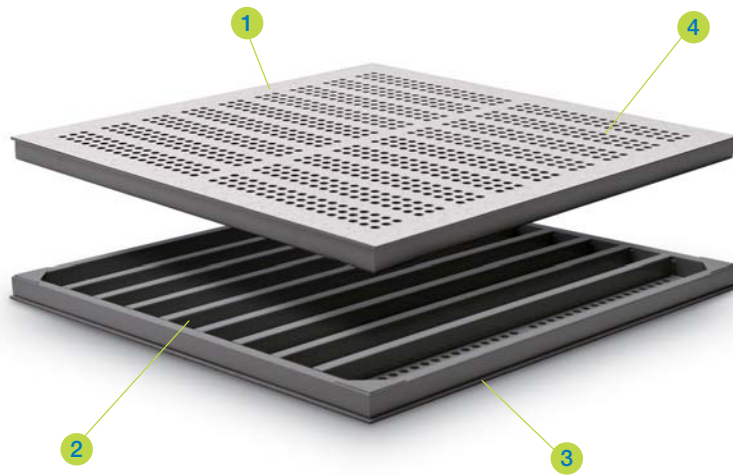

1 Airflow Rates

Rates: 20%; 25%; 30%; 36%; 45%

2 Bottom Structure

Thickness: 2.0mm

Material: Steel rectangular tube welded

3 Top Layer

Thickness: 2.0mm

Material: Cold rolled steel sheet

4 Finish

Thickness: Various



Material: Bare, Anti-static HPL,
Conductive Vinyl

Description

RhinoFLOR® Airflow panels are manufactured from structural steel technology makes the size and thickness same as RhinoFLOR® panels but light weight. The top surface of the panel is laminated with anti-static HPL or conductive vinyl tiles with numbers of different airflow rates, this resistance welded all-steel panels are the premier choice for computer rooms and data centers.

Features

- All-steel structural design
- 90% recyclable
- Light weight easy install and removal
- Powder-coated, protective epoxy finish
- Fully interchangeable with other EU panels

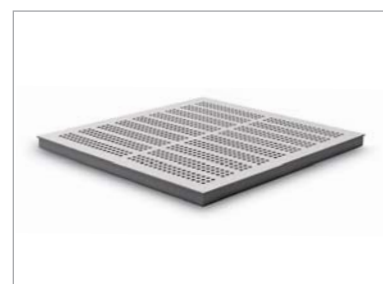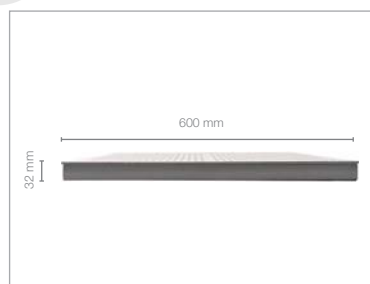


Panel Type	Panel Size	Top Steel Sheet	Panel Construction	Panel Thickness (Nominal)	System Weight (Typical)
RSP 800F	600 mm square	2.00 mm	Cold rolled steel welded	32.00 mm	31.07 kg/m ²
RSP 1000F	600 mm square	2.00 mm	Cold rolled steel welded	32.00 mm	33.85 kg/m ²

Product Ranges

RhinoFLOR® Airflow

System

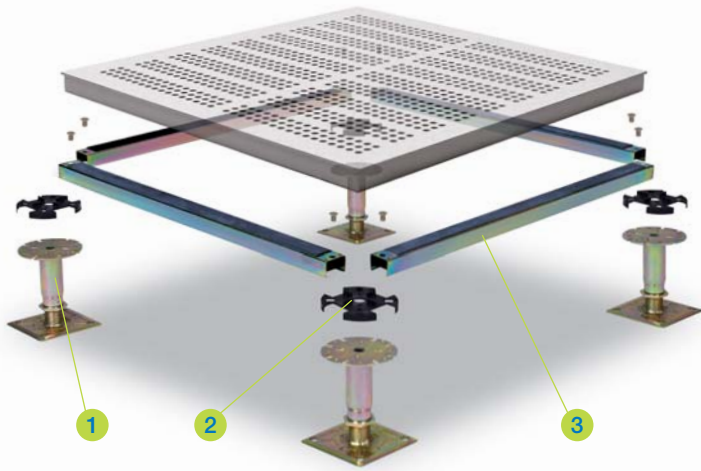

1 Standard Pedestal

Electro-galvanized steel made pedestal is suitable for raised floors with a finished floor height from 100mm to 600mm.

Zinc whisker free is available for special order.

Material: Steel, Yellow Galvanized.

2 Head Gasket

Plastic conductive material with sound proofing and sealing functions, equipped with tabs for the positioning of panels.

Thickness: 2.0mm


3 Stringer

Steel tube performed stringer with plastic gasket on top provide best supports to the structural system with limited air leakage and outstanding acoustic performance.

Dimension: 537mm x 30mm x 20mm

Thickness: 0.8/1.0/1.2mm

Pedestal

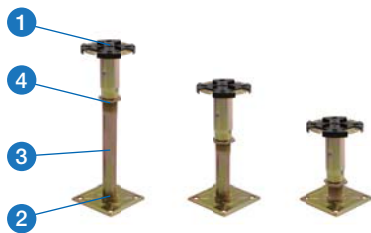

1 Head Assembly

Head plate: $\varnothing 90\text{mm} \times 3.0\text{mm}$
Head tube: $\varnothing 32\text{mm} \times 2.0\text{mm}$

2 Base Assembly

Base tube: $\varnothing 25\text{mm} \times 2.5\text{mm}$
Base Plate: $100\text{mm} \times 100\text{mm} \times 2.5\text{mm}$

3 FFH (Finished Floor Height)


100mm to 600mm

4 Adjusting Range

+/- 30mm

Performance

- This rigid grid system is tested in accordance with PSA MOB PS/SPU specification.
- Panel deflection at centre edge must not exceed 2.5mm
- Performance to a safety factor of 3 x static load
- Structural performance based upon a full Rhino access floors system i.e. panels & pedestals.

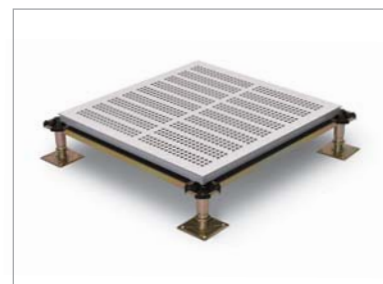

Panel Type	Panel Grade	Concentrated Load		Uniformly Distribution Load	Ultimate Load
		Point Load	Load Over		
		25mm x 25mm square	300mm x 300mm square		
RSP 800F	Medium Duty	3.00 kN	4.50 kN	8.00 kN/m ²	9.00 kN
RSP 1000F	Heavy Duty	4.50 kN	N/A	12.00 kN/m ²	13.50 kN

RHINO PROPERTY

RHINO[®]

Strive for perfection!

China Office

593, Tongjiang Road
Jintian Plaza 828-830
Changzhou 213022
Jiangsu, China

T/ (86) 519 8988 3171

F/ (86) 519 8988 3901

Bangkok Office

32 Soi Sukhumvit 36 (Napasub)
Sukhumvit Road, Klongton
Klongtoey, Bangkok 10110
Thailand

T/ (662) 661 2990

F/ (662) 661 2991

Hong Kong Office

7/F, Spa Centre
No. 53-55 Lockhart Road
Wai Chai
Hong Kong

T/ (852) 2793 5511

F/ (852) 3590 2333

Production Unit

Hengshanqiao
Wujin District
Changzhou 213119
Jiangsu, China

T/ (86) 519 8860 7959

F/ (86) 519 8860 5659

www.RhinoAccessFloors.com